

VORTEX

HEAVY DUTY BRUSH CUTTER



WWW.TREESHEARS.COM • 1-800-530-5407

MADE BY  DYMAX

EATS BRUSH

DYMAX VORTEX

Dymax has a long history of building the highest quality earthmoving and land clearing attachments. In fact, Quality, Integrity and Service have been the Balderson family watchwords since our first snowplows were built in 1930.

The Dymax Vortex Brushcutter is not a typical lightweight mower. With a 750


To view the Vortex Video,
go online to
www.TreeShears.com

lb. flywheel the Dymax Vortex literally "eats brush for breakfast" and provides the solution to clearing brush and small diameter trees. Like all Dymax products the Dymax Vortex is backed by the highest level of support and service in the industry. It is ideal for general land clearing, right-of-way maintenance and the removal of forest undergrowth in hazardous fuels reduction programs.

Dymax Vortex is available in two different body styles: the closed-end deck and open-end deck. The closed-end deck design is ideal for mulching materials into finer pieces while the materials are contained inside the Vortex. The open-end deck is designed to work in colder regions where frozen ground causes brush to bend at the ground line. The open-end deck allows the blade to cut the material before making contact with the deck. Open-end deck models are also ideal for customers wanting to clear land in a hurry.

The Dymax Vortex is available in standard flow or hi flow models. Ask a Dymax sales representative which model will work best for your application. Dymax Vortex Brushcutters get the job done. Call Dymax today.

CLOSED END DECK

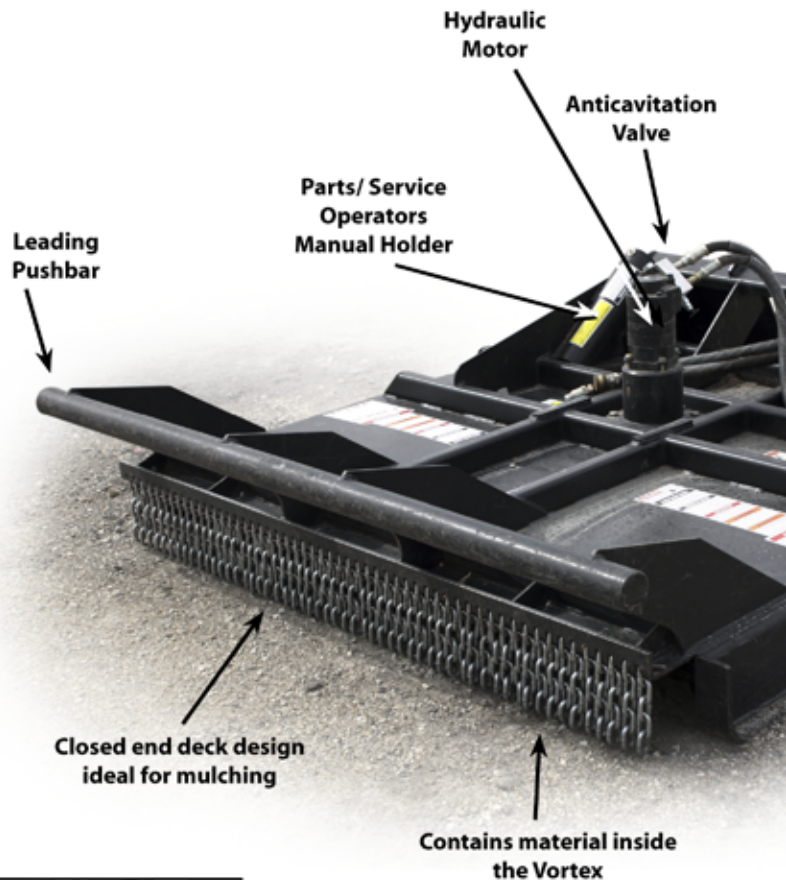

(Left) The Dymax Vortex destroys everything in its path, its manufactured with a 750 lb fly wheel that spins at 950 rpm.

WARRANTY

The Vortex is backed by a 2 year, 1000hr structural warranty. Contact Dymax for more information.

SPECIFICATIONS


		Cutting Width (inches)	Overall Length (inches)	Weight (lbs)
Vortex Model	V70	70	85	2,100
	Other/ Custom	Call	Call	Call



WWW.TREESHEARS.COM

FOR BREAKFAST

OPEN END DECK

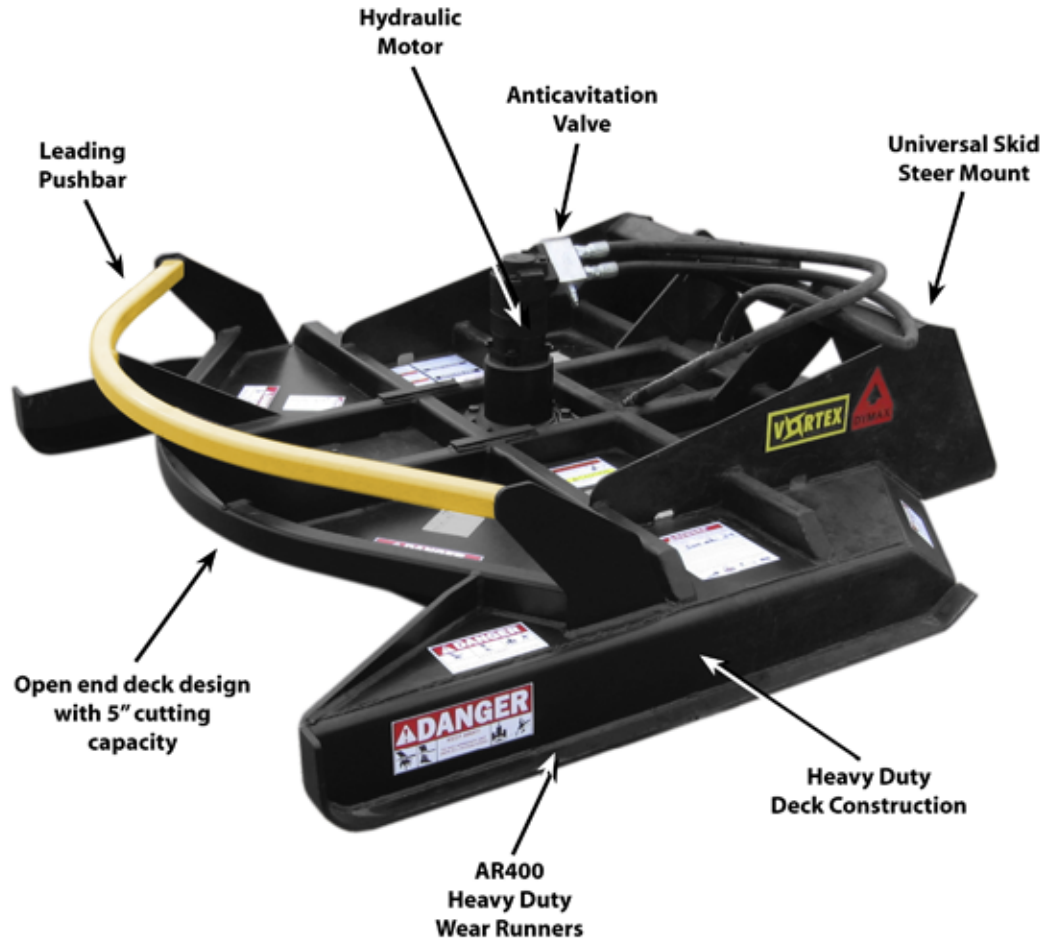

MACHINE REQUIREMENTS

		Hydraulic Flow Requirement: gpm	Hydraulic Pressure Requirement: psi	Machine Rated Operating Capacity: lbs
Machine Hydraulic Setup	Standard Flow	20 to 25	3,200	2,500 (minimum)
	Hi-Flow	25-33	3,200	2,500 (minimum)

Contact DYMAX Sales at 1-800-530-5407 or sales@DYMAXattachments.com

