







Pallet Forks with Hydraulically Adjustable Tines

for Skid-Steer Loaders and
Small Wheel Loaders

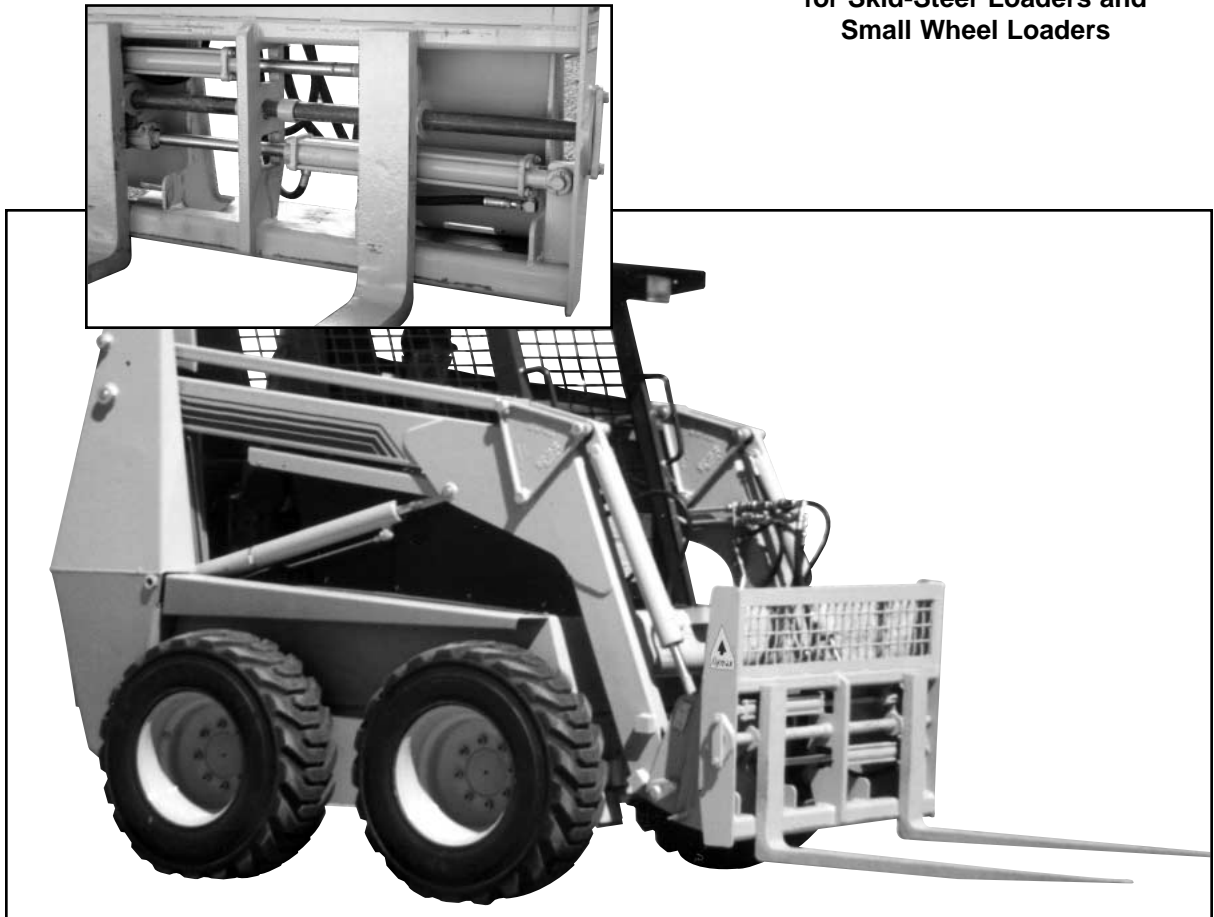

- **Dymax Pallet Forks with Hydraulically Adjustable Tines** for Skid-Steer Loaders and Small Wheel Loaders are perfect for loading, moving and handling unusual sized pallets.
- **Hydraulically Adjustable Pallet Forks** feature two hydraulic cylinders that easily adjust the tines, eliminating labor and lost time associated with manual adjustments.
- **Pallet Forks with Hydraulically Adjustable Tines** provide a measure of safety, eliminating the risk of pinched fingers and hands, as well as reducing the likelihood of strained backs that come from lifting and manually adjusting tines.
- Machines require an additional hydraulic circuit for operation of the adjustable tines.
- Tines are available in both 42" and 48" lengths.
- Tines are available in either 3,500 lb. or 5,000 lb. capacities. Other capacities are also available.

Pallet Forks with Hydraulically Adjustable Tines

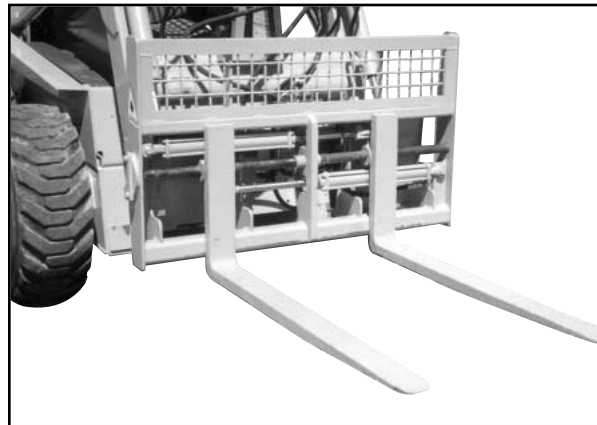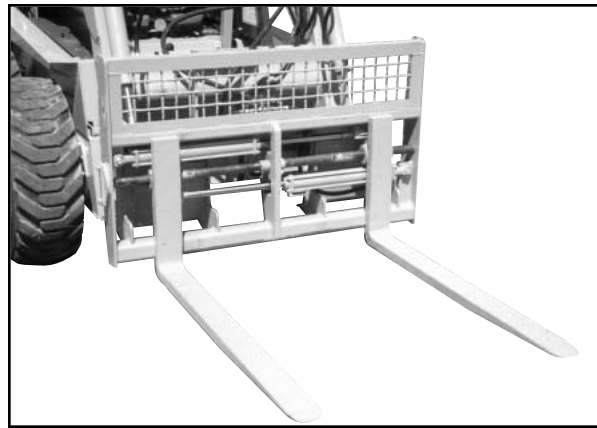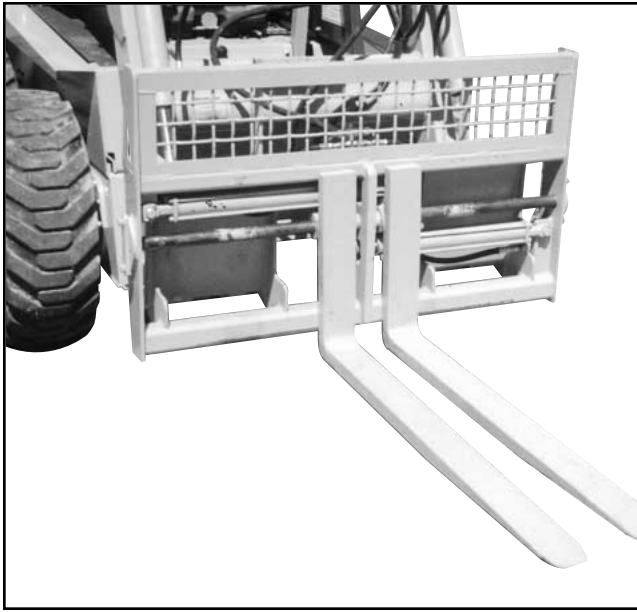

- Non-swinging tines are mounted to a 1 1/2" shaft.
- Cylinders have 2" bore, 16" stroke and 1 1/8" rod.

Specifications

Tine Length (in.)	Tine Dimensions (in.)	Capacity (lbs.)	Weight (lbs.)
42	1 1/4 X 4	3,500	490
42	1 1/2 X 4	5,000	515
48	1 1/4 X 4	3,500	520
48	1 1/2 X 4	5,000	550
Pallet Fork Dimensions			
Carriage Height (in.)			20
Carriage Width (in.)			52
Top Rack Height (in.)			12
Woven Screen			1 3/4" square
Screen material (in.)			5/16"
Maximum Outside Tine Width (in.) ¹			51
Minimum Outside Tine Width (in.) ²			18

¹See photo, top right

²See photo, top left

Materials and specifications subject to change without notice.



402 Miller Drive • P.O. Box 297 • Wamego, Kansas • 66547 • 1-800-530-5407
www.DYMAXattachments.com

Form No. 4141 (10-00)