DYMAX

T-RAILER 65K - HIGH RAIL TRANSPORTATION VEHICLE

DYMAX T-RAILERS
ARE THE ONLY PLATFORM THAT WORKS WITH 3RD RAIL SYSTEMS

Innovation is no less a part of railroad progress today than it was in the early days. But with progress comes new challenges. Right-of-way maintenance, track maintenance and new track construction create unique challenges, especially with hard-to-access sites.

The Dymax T-Railer 65K offers a unique solution to these challenges. With the ability to carry up to 65,000lbs it is the economical, efficient way to move equipment and materials to work sites. The Dymax T-Railer 65K is ideal for working in various applications and is the only platform available for use in conjunction with 3rd rail systems.

Dymax has a long history of customizing equipment specifically to your requirements. If you need a specific platform width, length or special decking we can tailor a T-Railer to meet your job requirements.

So whether you're a Class I or Class II railroad, a regional, a short line, a mass transit/light rail or a right of way maintenance contractor or drilling company, T-Railer saves you time and money. You can set it on the tracks or put it back on the highway in minutes. T-Railer eliminates the need to purchase or rent a special machine each time you need to operate an excavator, truck, or crane on the rails.

GET ON THE RIGHT TRACK
with DYMAX

T-Railer 65K - Platform

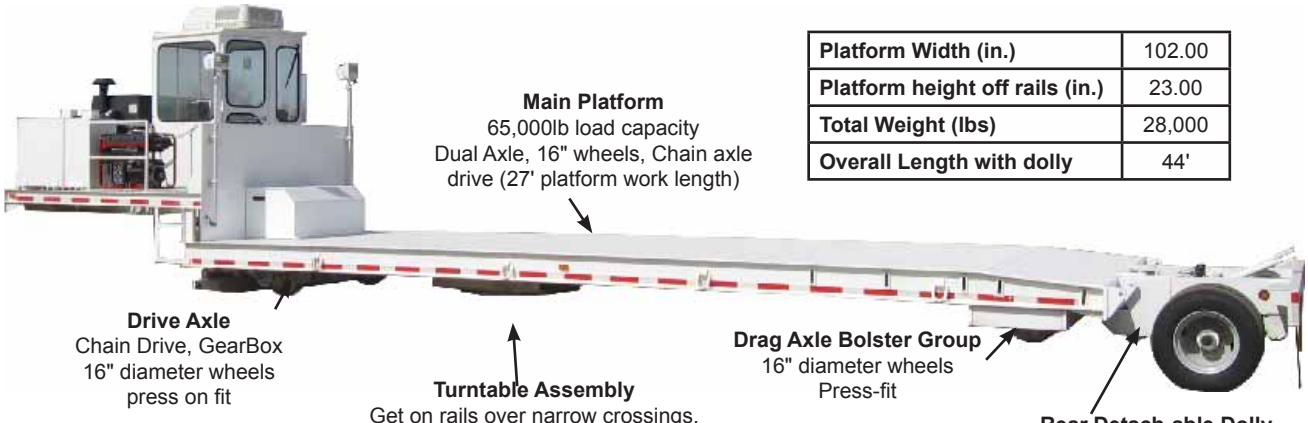

Platform Width (in.)	102.00
Platform height off rails (in.)	23.00
Total Weight (lbs)	28,000
Overall Length with dolly	44'

Main Platform
65,000lb load capacity
Dual Axle, 16" wheels, Chain axle drive (27' platform work length)

Drive Axle
Chain Drive, GearBox
16" diameter wheels
press on fit

Turntable Assembly
Get on rails over narrow crossings.
Rotates platform into position

Drag Axle Bolster Group
16" diameter wheels
Press-fit

Rear Detach-able Dolly
Removes & install in a few minutes
20,000lb axle allows transport over the road via common tractors.
features anti-lock brakes.

T-Railer 65K - Power

Engine	Deutz 2012 series 4 cylinder diesel Tier2/3 compliant
Drive System	Two-speed hydraulic with dual directional hydrostatic pump
Speed (m.p.h.)	15 mph (max) Speed will vary subject to actual grades & loads

T-Railer 65K - Options

LCD Camera System
3 and 4 camera systems available

Enclosed cab
Heat & Sliding Window
AC optional

Ballast Spreading Hopper
Spread ballast and level quickly with spreader bar

Lights
Work lights, safety light installation

Materials and specifications subject to change without notice.

DYMAX

Dymax Inc. 402 Miller Drive PO Box 297 Wamego KS 66547 USA
(p) 785-456-2081 (f) 785-456-8328 www.Dymaxattachments.com www.DymaxRail.com