


# DYMAX WORK TOOLS

## RAIL HANDLER FOR EXCAVATORS

### OVERVIEW

The Dymax Rail Handler was designed for handling all rail sizes up to 30 meter in length. Ideal for 20 ton excavators and larger, the Dymax Rail Handler picks rail from piles and places rail into position for flash butt welding operations. The Rail Handler makes Rail Handling safer and removes the need for chains, rigging and personnel climbing on rail piles.

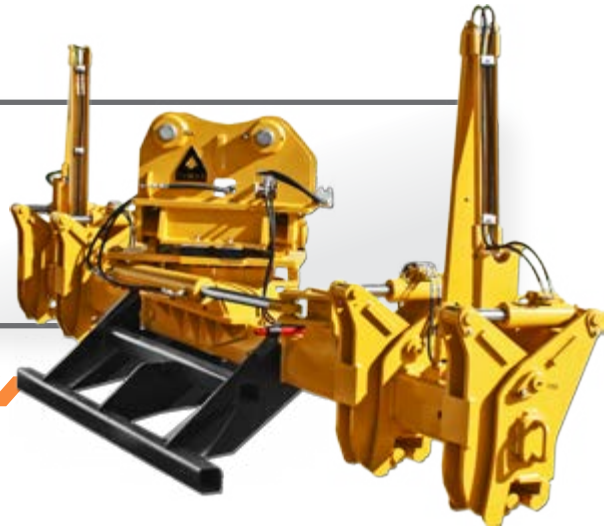

### FEATURES AND SPECIFICATIONS

- Lock-Valve cylinders
- 30° hydraulic rotation
- Storage stand
- 24v diverter valve provided
- High tensile steel rail grabs
- Pins for attaching to coupler system or machine
- Arms extend manually to 27 or 30 feet



| Hydraulic Functions Required                                     | Flow Ratings<br>GPM (LPM) | Pressure<br>PSI (bar) |
|------------------------------------------------------------------|---------------------------|-----------------------|
| Excavator - requires 1 two way flow circuit                      | 6-8 (22-30)               | 3,500 (241)           |
| Rotation Circuit - is provided with diverter valve and connector | 6-8 (22-30)               | 3,500 (241)           |

| Model #               | Description/Retracted x Extended (ft x ft - m x m) | Weight<br>lb | Weight<br>kg |
|-----------------------|----------------------------------------------------|--------------|--------------|
| DX-RH-GL-16x27-HX-20T | Rail Handler, Grapple (16 x 27 - 4.88 x 8.23)      | 4,500        | 2,041        |
| DX-RH-GL-18x30-HX-25T | Rail Handler, Grapple (18 x 30 - 5.49 x 9.14)      | 4,800        | 2,177        |
| DX-RH-GL-18x30-HX-30T | Rail Handler, Grapple (18 x 30 - 5.49 x 9.14)      | 5,200        | 2,359        |

Full model list available online



**DYMAX Rail** | Toll Free: 800.530.5407 (USA/CAN)  
 402 Miller Drive | Office: +1.785.456.2081  
 Wamego, KS 66547 USA | Fax: +1.785.456.8328

[www.DYMAXRAIL.com](http://www.DYMAXRAIL.com)  
[sales@DYMAXRAIL.com](mailto:sales@DYMAXRAIL.com)